

## Quick Reference Guide

### Caribbean Awning

- Operation
- Main materials
- Colour options
- Accessory option
- Reason mostly used



#### Operation

- ❑ THE CARIBBEAN® Awning is an aluminium hood awning consisting of alternate wide and narrow panels held together by concealed rivets. The distinguished bull nose front edge is enhanced with the wide panels finished off with a scalloped trim. The descending panels run perpendicular to the building and are arranged into attractive striping arrangements.
- ❑ Can accommodate slopes between 5° and 45°. A Sun Angle Chart will assist in determining the angle and drop of the Awning that will best satisfy your lighting requirements.

#### Main Materials

- ❑ Aluminium panels and roll-formed under structure coated using the HD COLORCOTE® Thermosetting Polymer Paint System for corrosion protection.
- ❑ Extruded, pressed and cast parts manufactured from Aluminium and powder coated.
- ❑ Plastic components are UV stabilised.
- ❑ All panels have a white underside for maximum heat reflection and for a neutral appearance from the interior of the building.

#### Colour Options

- ❑ Caribbean Awnings are available in 13 colours, matching the most popular COLORBOND® colours. Custom colours are available subject to minimum order quantities and lead times.
- ❑ Painted parts are coated to the Australian Standard AS2728:1997 and powder coated parts are coated to the Australian Standard AS3715, both to Product Type 3, Mild to Moderate, Tropical and Industrial (Exterior).

# Quick Reference Guide

## Caribbean Awning

### Accessory Options

- Side sections can be ordered to enclose the Awning structure.
- Depending on the projection of the Awning it can be self-supporting or supported with the aid of posts.

### Applications

- For commercial applications, CARRIBEAN® Awnings can be made for shop-fronts, restaurants, motels, walkways, etc or for domestic application over windows and doors.
- Mitred corners can be accommodated.

<b>Dimensions</b> Type	<b>CARRIBEAN®</b> Awning
<b>Maximum Width (mm)</b>	unlimited
<b>Minimum Width (mm)</b>	630
<b>Maximum Drop/Projection (mm)</b>	2700 (truss supported)
<b>Minimum Drop/Projection (mm)</b>	900, 15° (truss supported)
<b>Maximum Area (msq)</b>	unlimited

### Fire Retardant (AS 1530.3.1999)

Complies with the General and Special Requirements of the Building Code of Australia for Fire Hazard properties of materials in buildings as at the time of publication of this brochure.

- ❖ Ignitability Index 0 (Range 0-10)
- ❖ Spread of Flame Index 0 (Range 0-10)
- ❖ Heat Evolved Index 0 (Range 0-10)
- ❖ Smoke Developed Index 2 (Range 0-10)

# Quick Reference Guide

## Caribbean Awning


### Commercial Warranty

All Awnings are covered by a **12 month Commercial Warranty**.  
Conditions apply.

**Aluminium Awnings are completely recyclable.**

### Australian Made

Metal Awning components are designed and manufactured in Australia. These metal Awnings are made to measure in Australia.

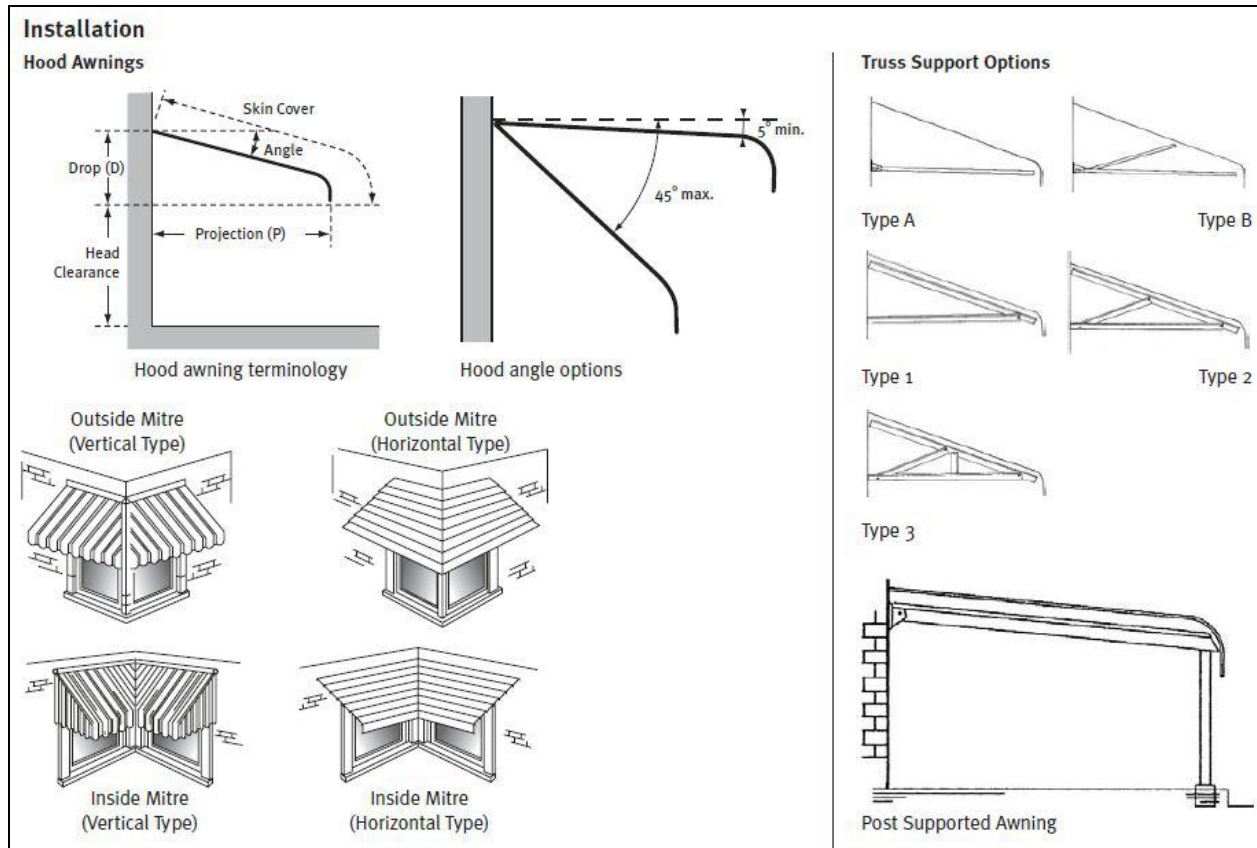

Quick Reference Guide  
Caribbean Awning

